

Bulletin 7110-1 Gimbaled Grommet Self Alignment Support System

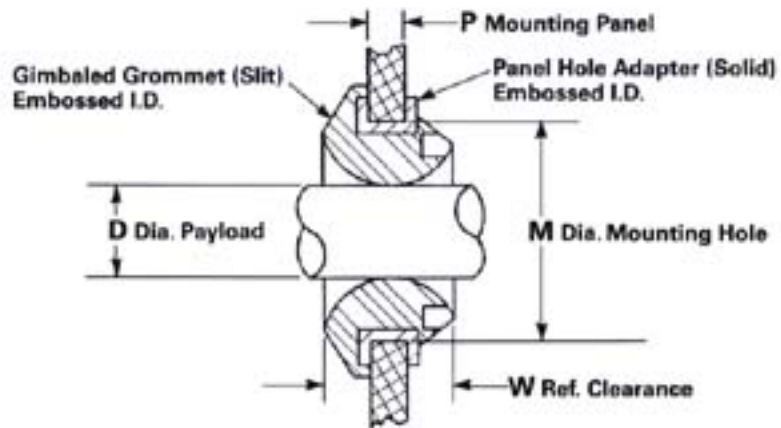
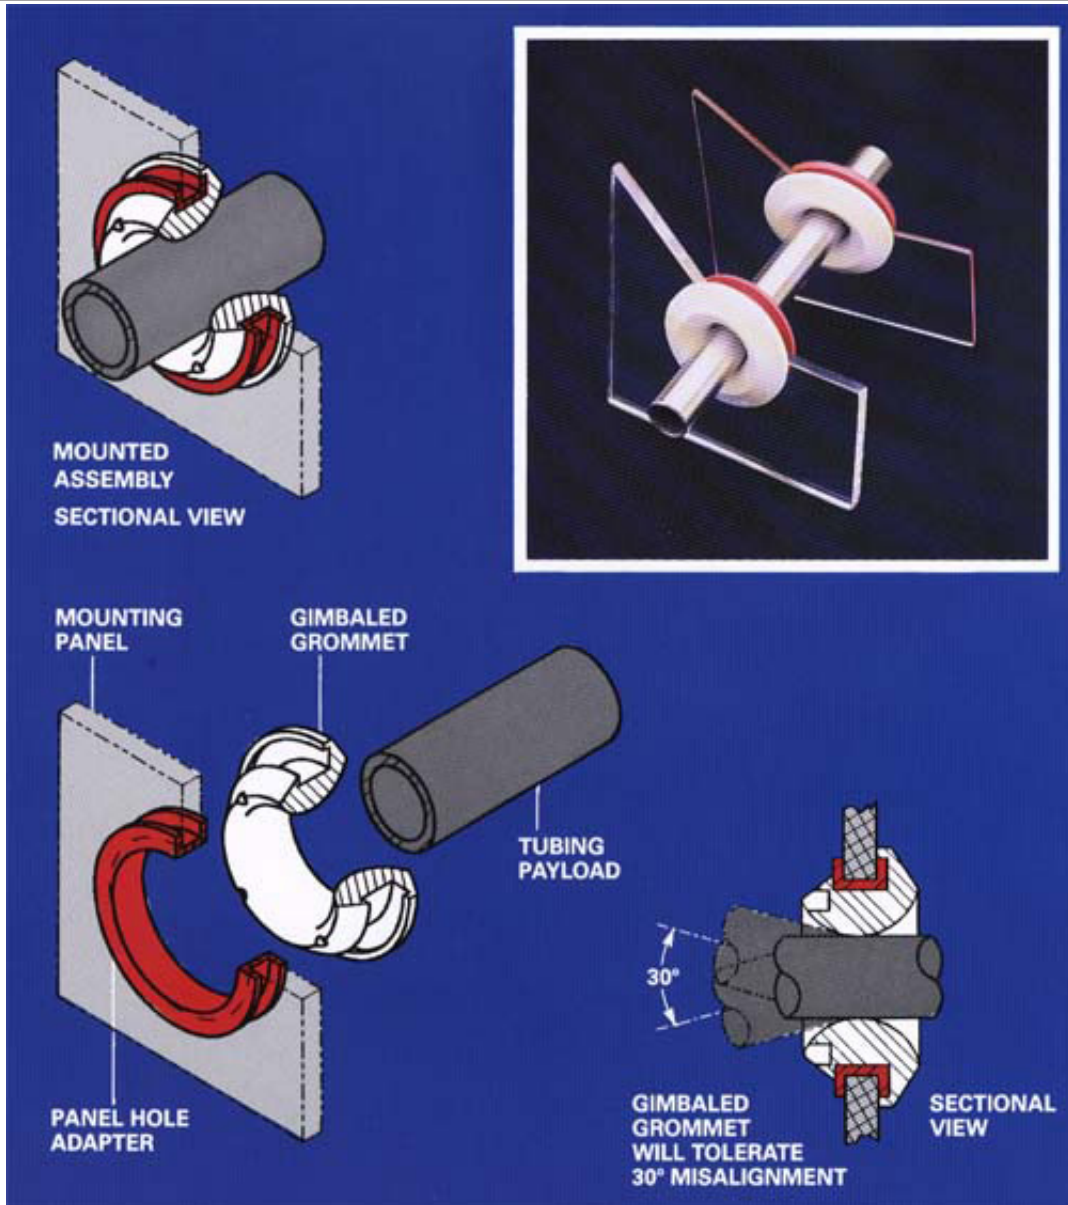


Diagram ID ▶	D	M	P	W	
	Ref.	Ref.	+/- .020 (.5mm)	+ .000 -.030 (.7mm)	Weight Each Assem.
Assembly Part Number					
TA71101001A04	.250 (6.4mm)	.709 (18.0mm)	A .079 (2.0mm)	.770 (19.6mm)	.34oz. (9.7g)
TA71101001B04	.250 (6.4mm)	.709 (18.0mm)	B .118 (3.0mm)	.770 (19.6mm)	.34oz. (9.7g)
TA71101001C04	.250 (6.4mm)	.709 (18.0mm)	C .157 (4.0mm)	.770 (19.6mm)	.34oz. (9.7g)
TA71101001D04	.250 (6.4mm)	.709 (18.0mm)	D .197 (5.0mm)	.770 (19.6mm)	.34oz. (9.7g)
TA71101001E04	.250 (6.4mm)	.709 (18.0mm)	E .079 (6.0mm)	.770 (19.6mm)	.34oz. (9.7g)
TA71101001A06	.375 (9.5mm)	.856 (22.0mm)	A .079 (2.0mm)	.790 (20.1mm)	.43oz. (12.2g)
TA71101001B06	.375 (9.5mm)	.856 (22.0mm)	B .118 (3.0mm)	.790 (20.1mm)	.43oz. (12.2g)
TA71101001C06	.375 (9.5mm)	.856 (22.0mm)	C .157 (4.0mm)	.790 (20.1mm)	.43oz. (12.2g)
TA71101001D06	.375 (9.5mm)	.856 (22.0mm)	D .197 (5.0mm)	.790 (20.1mm)	.43oz. (12.2g)
TA71101001E06	.375 (9.5mm)	.856 (22.0mm)	E .236 (6.0mm)	.790 (20.1mm)	.43oz. (12.2g)
TA71101001A08	.500 (12.7mm)	1.142 (29.0mm)	A .079 (2.0mm)	.790 (20.1mm)	.75oz. (21.3g)
TA71101001B08	.500 (12.7mm)	1.142 (29.0mm)	B .118 (3.0mm)	.790 (20.1mm)	.75oz. (21.3g)
TA71101001C08	.500 (12.7mm)	1.142 (29.0mm)	C .157 (4.0mm)	.790 (20.1mm)	.75oz. (21.3g)
TA71101001D08	.500 (12.7mm)	1.142 (29.0mm)	D .197 (5.0mm)	.790 (20.1mm)	.75oz. (21.3g)
TA71101001E08	.500 (12.7mm)	1.142 (29.0mm)	E .236 (6.0mm)	.790 (20.1mm)	.75oz. (21.3g)
TA71101001A10	.625 (15.9mm)	1.457 (37.0mm)	A .079 (2.0mm)	.890 (22.6mm)	1.08oz. (30.6g)
TA71101001B10	.625 (15.9mm)	1.457 (37.0mm)	B .118 (3.0mm)	.890 (22.6mm)	1.08oz. (30.6g)
TA71101001C10	.625 (15.9mm)	1.457 (37.0mm)	C .157 (4.0mm)	.890 (22.6mm)	1.08oz. (30.6g)
TA71101001D10	.625 (15.9mm)	1.457 (37.0mm)	D .197 (5.0mm)	.890 (22.6mm)	1.08oz. (30.6g)
TA71101001E10	.625 (15.9mm)	1.457 (37.0mm)	E .236 (6.0mm)	.890 (22.6mm)	1.08oz. (30.6g)
TA71101001A12	.750 (19.5mm)	1.653 (42.0mm)	A .079 (2.0mm)	.890 (22.6mm)	1.30oz. (36.9g)
TA71101001B12	.750 (19.5mm)	1.653 (42.0mm)	B .118 (3.0mm)	.890 (22.6mm)	1.30oz. (36.9g)
TA71101001C12	.750 (19.5mm)	1.653 (42.0mm)	C .157 (4.0mm)	.890 (22.6mm)	1.30oz. (36.9g)
TA71101001D12	.750 (19.5mm)	1.653 (42.0mm)	D .197 (5.0mm)	.890 (22.6mm)	1.30oz. (36.9g)
TA71101001E12	.750 (19.5mm)	1.653 (42.0mm)	E .236 (6.0mm)	.890 (22.6mm)	1.30oz. (36.9g)
TA71101001A16	1.000 (25.4mm)	1.850 (47.0mm)	A .079 (2.0mm)	.890 (22.6mm)	1.53oz. (43.4g)
TA71101001B16	1.000 (25.4mm)	1.850 (47.0mm)	B .118 (3.0mm)	.890 (22.6mm)	1.53oz. (43.4g)
TA71101001C16	1.000 (25.4mm)	1.850 (47.0mm)	C .157 (4.0mm)	.890 (22.6mm)	1.53oz. (43.4g)
TA71101001D16	1.000 (25.4mm)	1.850 (47.0mm)	D .197 (5.0mm)	.890 (22.6mm)	1.53oz. (43.4g)
TA71101001E16	1.000 (25.4mm)	1.850 (47.0mm)	E .236 (6.0mm)	.890 (22.6mm)	1.53oz. (43.4g)

Materials

Panel Hole Adapter, TA5816, Silicone Elastomer, 90 Duro. Color Red, Gimbaled Grommet, TA6711, Silicone Elastomer, 55 Duro. Color White

Packaging

Each assembly packaged in sealed plastic bag with paper tag listing assembly number, component numbers and assembly instructions.

Notes

Questions concerning sizes and/or applications, please contact TA Sales Representative.

PATENT APPLIED FOR. This document is the property of Kirkhill-TA and is conveyed with the express condition that it and the information contained in it are not to be used, disclosed or reproduced in whole or in part, for any purpose without the express written consent of Kirkhill-TA; and that no right is granted to disclose or so use any information contained in said document. These restrictions do not apply to vendor proprietary parts.